
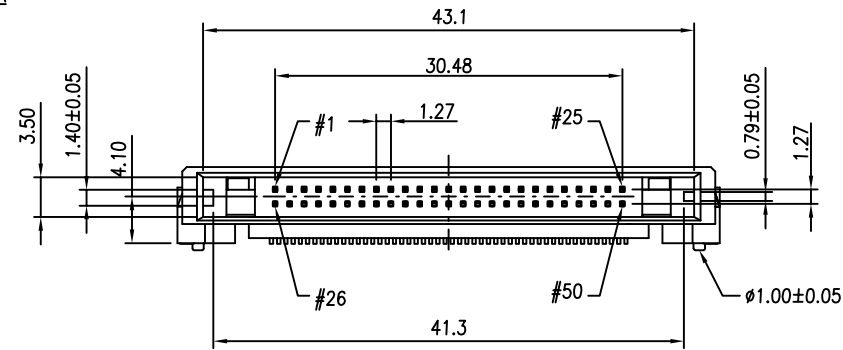
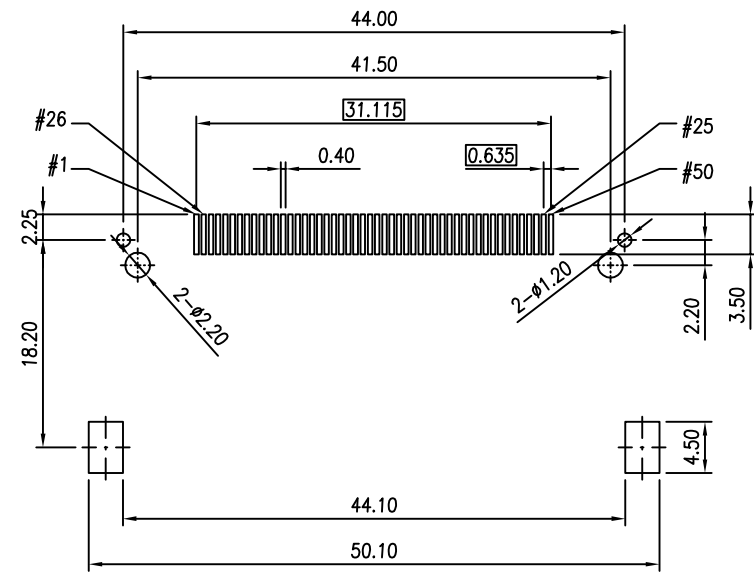
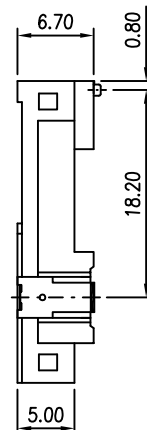
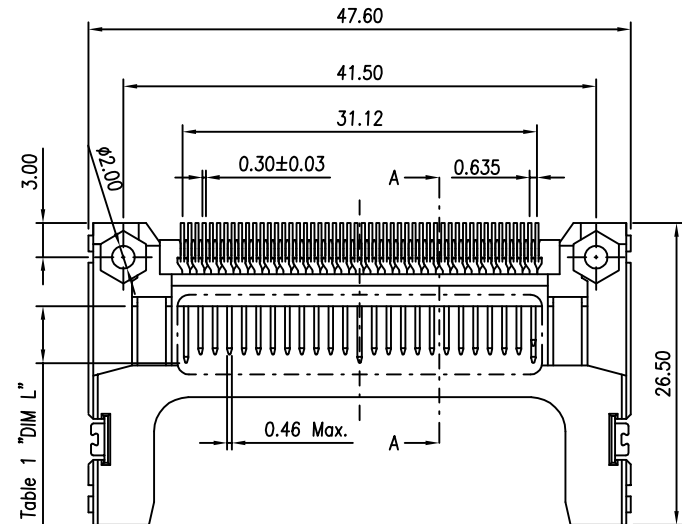


Table 1		
Pin Type	Dim. L	Pin No.
Detect	3.50mm (0.138in)	25,26
General	4.25mm (0.167in)	The Others
Power	5.00mm (0.197in)	01,13,38,50

NOTE:
1.MATERIAL
HOUSING: HIGH TEMPERATURE THERMOPLASTIC.
CONTACT: COPPER ALLOY ,t=0.3mm.
HOLDDOWN: BRASS , t=0.3mm
2.FINISH
CONTACT: UNDERPLATED: 50 u" MIN NICKEL.
CONTACT AREA: SELECTIVE GOLD OVER NICKEL PLATED.
SOLDER AREA: 100u" MIN TIN OVER NICKEL PLATED.
HOLDDOWN: 100u" MIN TIN OVER 50u" MIN NICKEL PLATED.

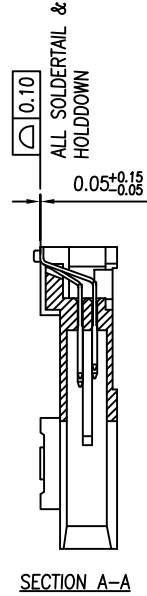

PART NO. CFH-R 3 C 1 L B M XX MN 2
Contact Area Plating
01: Gold Flash
15: 15u" Gold
30: 30u" Gold

				TOLERANCE		UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAXCONN ENTERPRISE LIMITED		TITLE: CF Card Header Type 1, Standoff 1.65mm	
				LINEAR	ANGLES				
				X.±0.30	X'±	APPD:	Jason	MAT'L:	PART NO. CFH-R3C1LBMXXMN2
				.X±0.20	.X'±	CHKD:	Schumi	FINISH:	DWG NO. CF107008
A	New Release	Wei Renwen	Apr,15,2007	.XX±0.15	.XX'±	DRWN:	Wei Renwen	Q'TY:	UNITS MM
REV	ECN NO.	NAME	DATE	.XXX±0.08	.XXX'±				SCALE 1 : 1
									SHEET 1 OF 1
									REV A