
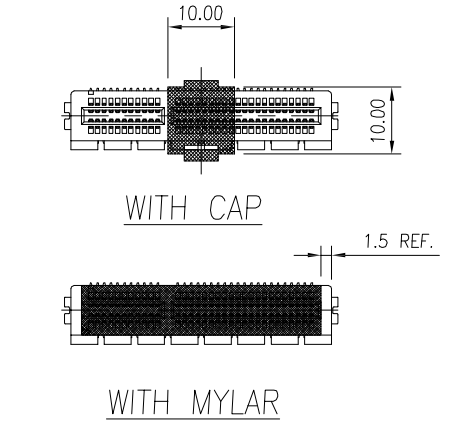
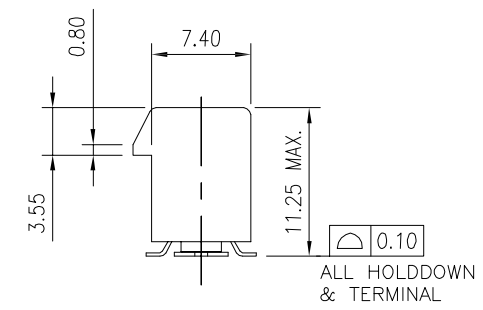
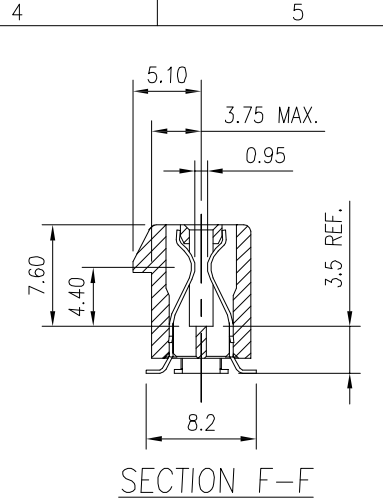
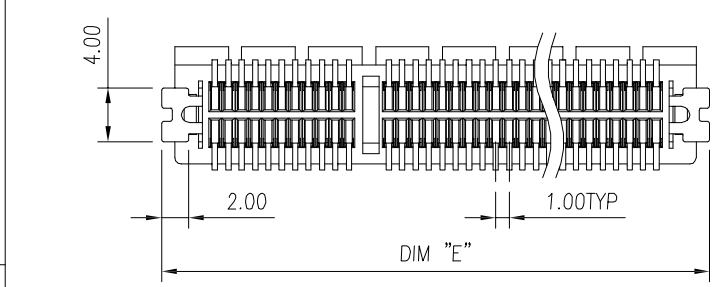
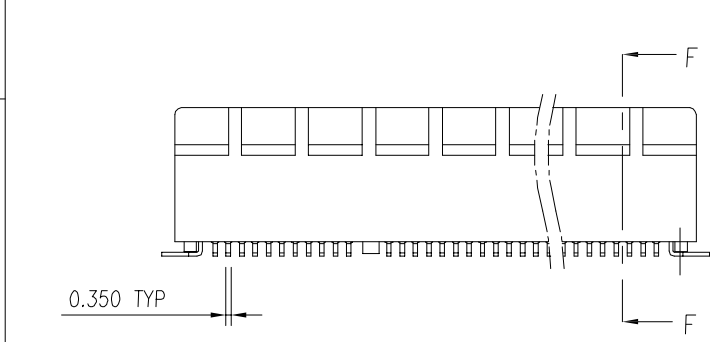


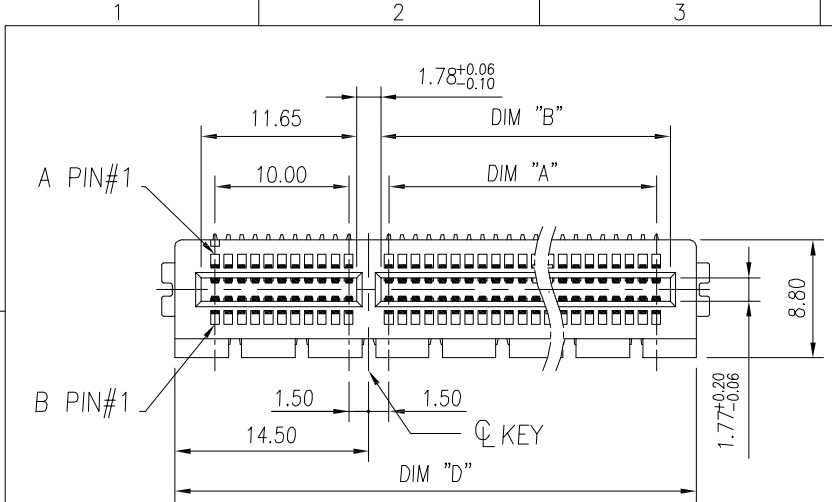

DIMENSIONS				
POSITION	A ±0.20	B ± 0.20 -0.08	D ±0.25	E ±0.25
36	6	7.65	25.00	27.00
64	20	21.65	39.00	41.00
98	37	38.65	56.00	58.00
164	70	71.65	89.00	91.00

- NOTES:
- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP, UL94V-0, COLOR: BLACK.
 - CONTACTS: COPPER ALLOY.
 - HOLDDOWN: COPPER ALLOY.
 - FINISH:
 - CONTACT:
SELECTIVE GOLD PLATING ON CONTACT AREA.
100μ" MIN. MATTE TIN PLATING ON SOLDER TAILS,
50μ" MIN. NICKEL UNDERPLATING OVERALL.
 - HOLDDOWN:
100μ" MIN. MATTE TIN PLATING WITH 50μ" MIN. NICKEL UNDERPLATE OVERALL.
 - PRODUCT SPEC.: PS-3GIO-02
 - PACKAGING SPEC.: TRAY : 311304001
REEL : 311304002

PART NO. 3166 - 1 X X X

PCI EXPRESS Series No. _____

HSG Color _____

1: Black

Contact Plating _____

0: 30μ", Gold

1: 15μ", Gold

2: 1μ", Gold

POS. Options _____

0: 36 Pin

1: 64 Pin

2: 98 Pin

3: 164 Pin

Packing Options

T: Tray Without Cap

C: Tray With Cap

N: Tray With Mylar

R: Tape & Reel Packaging Without Cap (For 36P, 64P, 98P)

P: Tape & Reel Packaging With Cap (For 36P, 64P, 98P)

M: Tape & Reel Packaging With Mylar (For 36P, 64P, 98P)

				TOLERANCE		UMax 东莞市友贸实业有限公司 conn DONGGUAN UMAXCONN ENTERPRISE LIMITED		TITLE: PCI EXPRESS SMT TYPE WITHOUT POST			
				LINEAR	ANGLES						
C	15008	Terry	Feb,26,2015	X.±0.40	X°.±	APPD:	Jason	PART NO.	3166-1XXX		
B	11059	Terry	Oct,06,2011	.X±0.30	.X°±	MAT'L:		DWG NO.	316607001		
A	09038	Terry	Aug,13,2009	.XX±0.20	.XX°±	CHKD:	Schumi	UNITS	SCALE	SHEET	REV
REV	ECN NO.	NAME	DATE	.XXX±0.10	.XXX°±	DRWN:	Terry	MM	1 : 1	1 OF 2	C
1	2	3	4	5	6	7	8	CUSTOMER			

